



daltile.com/xteriors



GRACIOUS OUTDOOR LIVING

Our high-style, 2CM pavers combine on-trend visuals with unsurpassed durability. Daltile's TREAD[™] collection of pavers offers the beauty of the finest natural wood and stone looks to your outdoor living environment.

I Brospont



WHY PORCELAIN?


Why is porcelain the ideal roofing material choice for new build or remodeled homes? Durability, beauty, and easy installation.

Made from only three natural ingredients – clay, sand, and feldspar – porcelain is synonymous with strength. It is resistant to scratches and abrasion, has very low water absorption (<0.5%), a high breaking strength, and it is resistant to stains, chemicals, and algae growth.

- Resistant to FrostIterational Control of Control of
- * On Perennial HD SKUs Only

Class IV Hail Impact Rating*

* Compared To Competitors

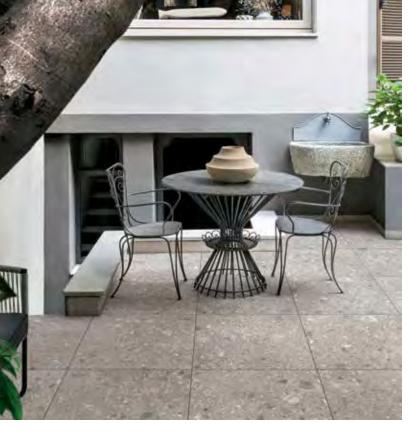



Stone Attaché[™] offers an extensive collection of elegant stone looks in wide range of modern and contemporary sizes and colors to match any theme. Featuring multiple grey color options plus black, white and taupe, the authentic stone graining and marble-like veining makes for distinctive design suited for the outdoors.

FLOOR STONE ATTACHÉ[™]

STONE LOOK

COLORBODY[™] PORCELAIN PAVERS



DELEGATE[™] - AVAILABLE IN 20 x 40



LIGHT GREY DL26

AMBASSADOR[™] - AVAILABLE IN 16 x 48







ASSEMBLE[™] - AVAILABLE IN 32 x 32







DIGNITARY[™] - AVAILABLE IN 24 x 24





SUPERIOR TAUPE DR08

Photo features Assemble[™], Dignitary[™] and Ambassador[™] pavers.

EMISSARY AS12

DARK GREY DL27

AVAILABLE IN 24 x 24 & 20 x 40

LIGHT GREY DP01





5

Commissary[™] is an excellent outdoor solution in five distinct wood look options. Available in two sizes, 24 x 24 and 16 x 48, this outdoor porcelain allows various design possibilities to come alive.

all the start all

A lat In did

and should be added on the

the shield be deal base when the boundary

A design of the second s

wild and the former

FLOOR COMMISSARY™ COLORBODY[™] PORCELAIN PAVERS

WOOD LOOK



FINISHES: TEXTURED

COLOR PALETTE







DEPUTY GREY



PROXY GREY



BUREAU BROWN

16 x 48 PAVER TILE



DEPUTY GREY CS30



PROXY GREY CS31



BUREAU BROWN CS33



REGENT HONEY CS34



COMMANDER BEIGE CS32

24 x 24 PAVER TILE



REGENT HONEY CS34

BUREAU BROWN CS33





TIMELESS STYLE. SUPERIOR DURABILITY.

See how 2CM Porcelain Pavers stack up against other products on the market.

	Porcelain Pavers	Clay Brick Pavers	Cast in Place Concrete	Concrete Pavers	Natural Stone
STAIN RESISTANCE	HIGH	Medium	Low	Low	Low
UV RESISTANCE	WILL NOT FADE	High	Low	Low	High
SCRATCH RESISTANCE	HIGH	Medium	Low	Low	Low
FREEZE THAW RESISTANCE	FREEZE THAW PROOF	Medium	Low	Low	Low
DE-ICING SALT RESISTANCE	HIGH	Medium	Low	Low	Low
ACID RESISTANCE	HIGH	Low	Low	Low	Low
WATER ABSORPTION (ASTM #373)	< 0.5%	< 8%	< 10%	< 5%	< 5%
SEALING	NEVER	No	Recommended	Recommended	Recommended
COMPRESSIVE STRENGTH (PSI)	>30,000	>8,000?	>2,500 (residential) >4,000 (commercial)	>8,000	1,800–19,000 (depending on stone)
WEIGHT (LBS/SF)	9	21 – 31	12.5	27 – 36	15 – 50 (depending on stone)



SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
32 x 32 Paver Tile	(31-5/16" x 31-5/16") (79.50 cm x 79.50 cm)	13/16″ (2cm)	6.89	1
24 x 24 Paver Tile	(23-7/16" x 23-7/16") (59.50 cm x 59.50 cm)	13/16" (2cm)	7.76	2
20 x 40 Paver Tile	(19-1/2" x 39-3/16") (49.50 cm x 99.50 cm)	13/16″ (2cm)	5.38	1
16 x 48 Paver Tile	(15-9/16" x 47") (39.6 cm x 119.5 cm)	13/16" (2cm)	5.16	1

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	~
Shower Floors (Residential or Light Commercial)	≥ 0.42	\checkmark
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	\checkmark
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest[™], visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

INSTALLATION

Dry Laying on Grass:	The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Dry Laying on Gravel:	Gaps of at least 3/16" (5 mm) should be left between slabs, using spacers to set the correct width. Joint may be left empty or filled with fine sand, polymeric sand specifically formulated for porcelain tile or small, clean aggregate, depending on the joint width and desired aesthetic.
Dry Laying on Sand:	The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Laying on Screed with Adhesive:	Slabs must be laid with open joints of variable width of no less than 3/16" (5 mm).
Raised Pavings:	Pedestal contains correct tile spacers for application.

Visit daltile.com/xteriors for in-depth instructions, specifications and support details.

SHADE VARIATION

CS30, CS34 DP01, DP03	Medium (V2) - Color Variation within each Tile
CS32 DL26, DL27	High (V3) - Some Variation from Tile to Tile, and within each Tile
CS31, CS33 AM33, AM34 AS10, AS11, AS12 DR07, DR08, DR09	Random (V4) - Considerable Variation from Tile to Tile

PERFORMANCE CHARACTERISTICS

	ASTM#	Paver Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 1000 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For addition on test results, visit us at: daltile.com/information/TestResults.

ZEROT@X


Healthy Homes | Healthy Planet






All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

FINISH YOUR LOOK WITH AVAILABLE TRIM SHAPES.



RECTIFIED COPING

The coping tile finishes steps, tops of walls and similar features. It has a nondrip edge at the bottom to interrupt the flow of water, directing it straight onto the ground to protect the structure.



RECTIFIED L-EDGING

The versatile L-edging tile is ideal for the edges of paths, pools and other design features.

RECTIFIED GUTTER

The gutter tile with internal patterning is used underneath grid tiles to collect drain water.



RECTIFIED L-KERB

The L-kerb tile can be used to


enclose and complete the edges of

paths and other design features.

RECTIFIED GRID

Run-off or overflow water passes through the grid tile for collection.

* Trim items available in many sizes and colors. Consult with your sales representative and/or design team for specifics.

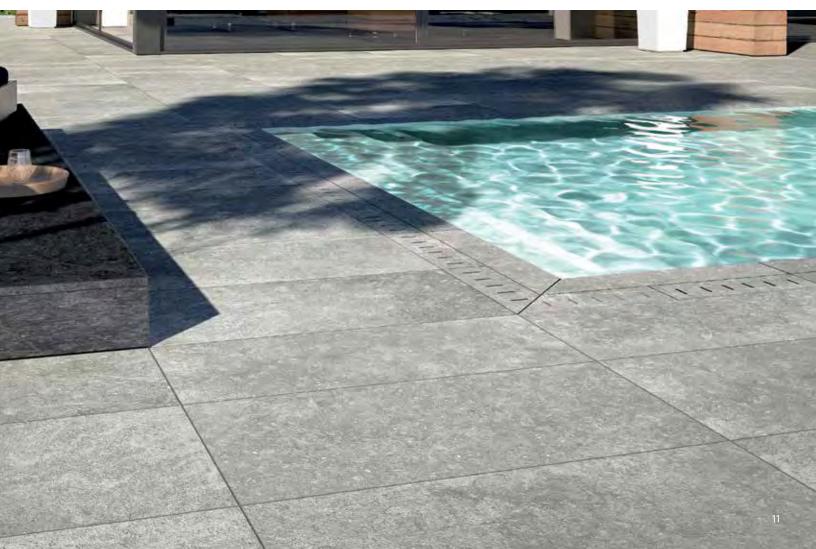

'ERTICA ALL COMPLEMENT

AMBASSADOR[™] - RANDOM LINEAR MOSAIC



DIPLOMACY[™] - BRICK-JOINT MOSAIC



DIGNITARY[™] - ABSTRACT MOSAIC



WHITE DR07 BEIGE DR09 ASSEMBLE[™] - 2 x 2 MOSAIC

DARK GREY DL27





MAGISTRATE AS11

EMISSARY AS12

BRICKWORK[™] - 2 x 8 QUARRY TILE

STACKED STONE - QUARTZITE



2

ALCOVE BW04

SANYA WHITE S702 6" x 24" Stacked Stone

Natural Cleft Ungauged

LIGHT GREY DP01

1.000

10 ATRIUM BW02

TERRACE BW05

DARK GREY DP03





CORRIDOR BW06

MACAU BLACK S701 6" x 24" Stacked Stone

6H x 8L/ 6H x 15-1/2L Stacked Stone Corner

Natural Cleft Ungauged

BRICKWORK[™] - 4 x 8 QUARRY TILE

DELEGATE[™] - RANDOM LINEAR MOSAIC

LIGHT GREY DL26



ATRIUM BW02





STACKED STONE -SANDSTONE*



EASTERN SAND S319 6" x 24" Stacked Stone Natural Cleft Ungauged





DYNASTY MOUNTAIN S318 6" x 24" Stacked Stone Natural Cleft Ungauged



6H x 8L/ 6H x 15-1/2L Stacked Stone Corner



Natural Cleft Ungauged



BEIJING GREEN S282

Stacked Stone

Natural Cleft Ungauged

6" x 24"

6H x 8L/ 6H x 15-1/2L Stacked Stone Corner



GOLDEN SUN S783 6" x 24" Stacked Stone Natural Cleft Ungauged

6H x 8L/ 6H x 15-1/2L Stacked Stone Corner

Time



Stacked Stone Corner

SHANGHAI RUST S349 6" x 24' Stacked Stone Natural Cleft

Ungauged



6H x 8L/ 6H x 15-1/2L Stacked Stone Corner 6H x 8L/ 6H x 15-1/2L Stacked Stone Corner



Stacked Stone Natural Cleft Ungauged



6H x 8L/ 6H x 15-1/2L Stacked Stone Corner





6H x 8L/ 6H x 15-1/2L Stacked Stone Corner



TIBETAN SLATE S317 6" x 24" Stacked Stone

STACKED STONE -

STUDIO BW01

ALCOVE BW04

SLATE*





PATIO BW03

TERRACE BW05





Our collection of outdoor tile for vertical surfaces is the perfect place to start for stand-out design on outdoor feature walls, fireplaces, pools, and more.

13

WHY ROOFING?



More than seven decades of experience working with tile, we understand the value of durability

We know the materials that can withstand extreme wear and tear



Arth.

We know luxury and longevity - two qualities every roof should have

Comprehensive expertise resulting in roofing tiles with timeless beauty and everlasting quality - all while being affordable and easy to install



CLASSIC TIMBER



NORDIC TIMBER PR40



MYSTIC TIMBER PR41

LAVISH CLAY



ADOBE CLAY PR44

OPULENT SLATE



IMPRESSIONIST GREY SLATE PR42



ONYX SLATE PR45



ANTIQUE SLATE PR43

ROOF TILE - SIZES

HD	11 x 22 Roof Tile	(11-1/4" x 22-1/2") (28.60 cm x 57.20 cm)	(12-13mm)	77	743.00 Lbs.	7	32
STANDARD	11 x 22 Roof Tile	(11-1/4" x 22-1/2") (28.60 cm x 57.20 cm)	(8-9mm)	77	535.00 Lbs.	10	32
	Nominal Size	Actual Size	Thickness	Pieces/ Square	Weight/ Square	Pieces/ Carton	Carton/ Pallet

PANORAMIC

porcelain surfaces™

Surfaces Like You've Never Seen Them Before

If you've ever dreamt of using limestone slab in places limestone should never be used, Panoramic can help you make those dreams come true.



ELEMENTAL SELECTION

Photo features Elemental Selection Moonstone matte on the floor and Moonstone glossy on the wall.







NEW



TITANIUM GREY CM13



ONYX GALAXY CM14



STATUARIO CM03



*6MM – AVAILABLE IN MATTE FINISH ONLY



ALACATTA CM04



BLANC CM05*



INDUSTRIAL SELECTION

Photo features Industrial Selection Cinder Rail matte on the floor and wall.



BELMONT TERRACE CM07



VICKERY TAUPE CM10



STONEWALL COAL CM09



HEARTH SMOKE CM08



MANOR WHITE CM18*





CHARRED NICKEL CM16

METALLIC SELECTION

Photo features Metallic Selection Obsidian matte and Elemental Selection Diamond Mine glossy on the wall.



NEW! CHROMIUM CM19





Visit Daltile.com/xteriors for more details and information.